

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number
WO 02/26181 A1

(51) International Patent Classification⁷: **A61F 13/02**,
13/12, A61B 17/04

(21) International Application Number: PCT/US01/06333

(22) International Filing Date: 27 February 2001 (27.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/671,129 27 September 2000 (27.09.2000) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventor: **DUNSHEE, Wayne, K.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: **SPRAGUE, Robert, W. et al.**; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

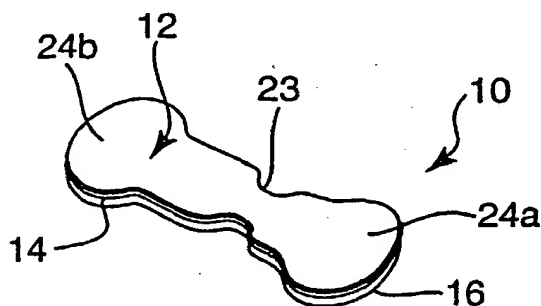
(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONFORMABLE ADHESIVE WOUND CLOSURES



(57) Abstract: A wound closure including a wound bridging portion that has sufficient dimensional stability to hold the wound edges in proper alignment, even in the face of substantial stretching of the wound closure as a whole, is disclosed. The wound closure is dimensionally stable directly over the wound. The remainder of the wound closure is preferably substantially more extensible and elastic than the wound bridging portion to improve conformability and adhesion of the wound closure to the patient. The wound closures may include opposing end portions of unequal lengths yielding an asymmetric shape that facilitates close placement of the wound closures along a wound.

WO 02/26181 A1

CONFORMABLE ADHESIVE WOUND CLOSURES

Technical field

5 The invention relates generally to adhesive wound closures.

Background

10 In medicine, sutures have long been used to close serious wounds. More recently, adhesive closures have been introduced that can effectively close some types of wounds without inflicting the additional injury inherent in suturing. These adhesive closures have a backing to provide solid structure, and have an adhesive layer for adhering to the skin. There are two main criteria that must be reconciled in a successful design for these products: reliable adhesion to the skin, even when the wound is adjacent to a joint; and good performance in keeping the wound edges in proximity to each other.

15 One approach is to use a non-woven web as the basic backing, and to reinforce this material with strong fibers in the longitudinal, or cross-wound, direction. The main substance of the backing can bend with the skin as the patient moves, and the reinforcing fibers strengthen the lightweight backing so that the structure can resist wound edge separation. This backing is combined with a strong skin adhesive over the entire skin
20 contacting surface. The strength of the reinforcing fibers, combined with their secure anchorage immediately adjacent to the wound edges provides excellent security against wound separation. For example, Steri-Strips™ wound closures, commercially available from Minnesota Mining and Manufacturing Company of St. Paul, MN, are constructed in this way.

25 One limitation on this approach is partially a psychological one, i.e., concern about the placement of skin adhesive to the area directly above the wound edge. That concern may include an apprehension that the adhesive will stick to the wound edge and re-open the partially healed wound when the closure is removed at the end of treatment. This can, in fact, happen if care is not taken when removing the closures.

30 To address the problem of adhesion to wound edges, some wound closures include a non-adhesive wound contact layer adhered to the skin adhesive layer over a limited

surface area of the underside of the skin adhesive layer, so as to be placed right over the wound. Because such devices are not anchored immediately adjacent the wound edges, the desired dimensional stability to resist wound opening is provided primarily by the backing. For example, Band-Aid Brand Butterfly Closures, commercially available from Johnson & Johnson Company of Skillman, NJ, are constructed in this way. Because the backing is substantially stiff overall, however, it can be difficult to obtain good long-term adhesion adjacent to a joint where, for example, the skin is constantly stretching and unstretching.

Reconciling these approaches to obtain good conformability and adhesion, secure wound edge positioning, and easy release of the product from the wound edge at the end of treatment, would be much appreciated by medical practitioners. Additionally, it would be appreciated if such a wound closure were constructed so as to fit more easily onto body locations where space is at a premium. Cuts to the face over the bony ridge just above the eye, for example, are difficult to treat with existing products since their length carries them onto the eyelid.

Summary of the Invention

The present invention addresses the problems discussed above by providing a wound closure including a wound bridging portion that has sufficient dimensional stability to hold the wound edges in proper alignment, even in the face of substantial stretching of the wound closure as a whole. The wound bridging portion is dimensionally stable where it is most needed, i.e., directly over the wound. The remainder of the wound closure is preferably substantially more extensible and elastic than the wound bridging portion to improve conformability and adhesion of the wound closure to the patient.

The invention preferably provides a wound closure having a backing made from an elastomeric web, preferably a nonwoven elastomeric web including thermoplastic elastomeric melt blown fibers. The backing material preferably has multi-directional elastic properties, so much so that the wound closure recovers at least 85% after being stretched 30%. More preferably, the backing recovers at least 95% after being stretched 30%.

The wound bridging portion is relatively dimensionally stable, i.e., the wound bridging portion stretches less than the remainder of the wound closure, e.g., the opposing end portions, when the wound closure is subjected to a stretching force. The wound bridging portion preferably stretches 8% or less when the wound closure stretches 30%.

5 More preferably, the wound bridging portion stretches 5% or less when the wound closure stretches 30%, and most preferably the wound bridging portion stretches 1% or less when the wound closure stretches 30%. In some instances, the wound bridging portion may experience some elongation, i.e., stretches more than 0%, when the wound closure is stretched.

10 A reinforcing layer that is separate from a backing may be used in the wound bridging portion of the wound closure to provide the desired dimensional stability to the wound bridging portion. That reinforcing layer may take the form of a wound contact layer (i.e., a layer in contact with a wound when in use) if it is located on the patient side of the wound closure. Alternatively, for example, the reinforcing layer may be located on
15 the side of the backing facing away from the wound. Regardless of its location, it is preferred that the reinforcing layer be firmly attached to the backing such that the reinforcing layer does not delaminate from the wound closure when the wound closure stretches, more preferably, the reinforcing layer does not delaminate from the wound closure when the wound closure stretches 30%. The reinforcing layer may be attached to
20 the wound closure using any suitable technique, e.g., adhesives, welding, etc.

If the reinforcing layer is located on the wound side of the wound closure, it may be preferred that the reinforcing layer have a thickness of 75 microns (0.003 inch) or less. Thicker layers may be detectable because the patient can sometimes feel the reinforcing wound contact layer against the tender wound edges. More preferably, the wound contact
25 layer has a thickness of 60 microns (0.0023 inch) or less.

The wound closures of the invention also include adhesive for attaching the wound closure to the skin. The adhesive is preferably a pressure sensitive adhesive. Preferably, this is a relatively aggressive adhesive, capable of taking a firm grip on the patient's skin to prevent unwanted detachment. The adhesive used to attach the wound closure to the
30 patient's skin may also be used to attach a reinforcing layer to the wound closure in the

wound bridging portion if that adhesive is strong enough to prevent delamination of the reinforcing layer from the wound closure when the wound closure stretches.

In one aspect, the present invention provides a wound closure for closing a wound in skin, the wound closure including an adhesive for adhering the wound closure to skin; opposing elastomeric end portions; and a wound bridging portion between the end portions; wherein the wound closure recovers at least 85% after being stretched 30%, and wherein the wound bridging portion stretches less than the end portions when subjected to the same force, whereby the wound bridging portion tends to maintain the wound closed against forces generated by stretching of skin.

In another aspect, the present invention provides a wound closure for closing a wound in skin, the wound closure including opposing end portions and an intermediate portion separating the end portions; an adhesive for adhering the wound closure to skin; wherein the end portions and the intermediate portion include an elastomeric backing; and wherein a reinforcing layer is attached to the backing only in the intermediate portion such that the intermediate portion defines a wound bridging portion including the elastomeric backing and the reinforcing layer; and further wherein the wound closure recovers at least 85% after being stretched 30% and the wound bridging portion stretches less than the end portions when subjected to the same force, whereby the wound bridging portion tends to maintain the wound closed against forces generated by stretching of skin.

In another aspect, the present invention provides a wound closure for closing a wound in skin, the wound closure including an adhesive for adhering the wound closure to skin; two opposing end portions located at opposing ends along a length of the wound closure; and a wound bridging portion separating the opposing end portions, the wound bridging portion having a width less than a width of the end portions; wherein the opposing end portions have unequal lengths as measured from the wound bridging portion to the ends of the wound closure.

In another aspect, the present invention provides a method of tending a wound by providing a wound closure having a short side and a long side, the wound closure including an adhesive for adhering the wound closure to skin; two opposing end portions located at opposing ends along a length of the wound closure; and a wound bridging portion separating the opposing end portions, the wound bridging portion having a width

less than a width of the end portions. The opposing end portions of the wound closure have unequal lengths as measured from the wound bridging portion to the ends of the wound closure, with the shorter end portion providing the short side of the wound closure and the longer end portion providing the long side of the wound closure. The method further includes adhering the wound closure to a patient such that the wound bridging portion spans a wound.

These and other features and advantages of the present invention are discussed in connection with illustrative embodiments of the invention below.

Brief Description of the Drawing

In the several figures of the attached drawing, like parts bear like reference numerals, and:

Fig. 1 illustrates a perspective view of a wound closure made according to the present invention;

Fig. 2 illustrates a top plan view of the wound closure in Fig. 1;

Fig. 3 illustrates a side view of the wound closure of Fig. 2;

Fig. 4 illustrates four of the wound closures of the present invention used in coordination to hold the wound edges of a wound on the arm of a patient;

Fig. 5 illustrates a wound closure in use near a closed human eye to bind a wound on the orbital ridge;

Fig. 6 illustrates the wound closure of Fig. 5 with open eye; and

Fig. 7 illustrates four wound closures provided on a single release liner.

Detailed Description of Illustrative Embodiments of the Invention

Referring now to Figs. 1 and 2, an exemplary wound closure 10 according to the present invention is illustrated. The wound closure 10 has a backing 12 and a layer of skin adhesive 14 contacting the backing. The depicted embodiment conveniently includes a release liner 16 to protect the adhesive layer 14 between the time the wound closure 10 is made and the time when it is to be applied to the skin.

The wound closure 10 includes a wound bridging portion 22 located between opposing end portions 20a and 20b. The wound bridging portion 22 preferably includes a

neck 23 where the width narrows as compared to the opposing end portions 20a and 20b (where width is measured transverse to the length of the wound closure 10). The neck 23 of the wound bridging portion 22 is intended to be placed directly over the wound edges on the body so that the maximum practical amount of the wound can be seen by medical practitioners.

Pad portions 24a and 24b are preferably located at the distal ends of the end portions 20a and 20b of the wound closure 10. The pad portions 24a and 24b may widen as illustrated to increase the surface area available for the adhesive layer 14 to take an adhesive purchase on the skin's surface.

Referring to Fig. 2, it may be preferred that the wound closure 10 is not symmetrical from end to end, but rather the lengths of the opposing end portions 20a and 20b as measured from the wound bridging portion 22 are unequal, i.e., one of the end portions 20a is shorter than end portion 20b. The benefits of such an asymmetrical arrangement are discussed in greater detail below.

A side view of the wound closure of Fig. 2 is depicted in Fig. 3. In this view it may be seen that the release liner 16 may conveniently be divided into two slightly overlapping sections 16a and 16b. This arrangement facilitates the peeling of the release liner 16 from the adhesive layer 14 immediately before use.

Figure 3 also depicts a reinforcing layer 26 that may preferably be adhered to the adhesive layer 14. It may be preferred that the reinforcing layer 26 be attached to the wound closure 10 only in the wound bridging portion 22, more preferably the neck 23, in which case the end portions 20a and 20b are free of the reinforcing layer 26. It is preferred that the reinforcing layer 26 be firmly attached to the wound closure 10 such that the reinforcing layer 26 does not delaminate from the wound closure 10 when the wound closure stretches. More preferably, the reinforcing layer 26 does not delaminate from the wound closure 10 when the wound closure stretches 30%. In the depicted embodiment, the reinforcing layer 26 is attached to the wound closure using the adhesive 14, although the reinforcing layer 26 may be attached to the wound closure 26 using any suitable technique, e.g., adhesive (the same or different than the adhesive used to attach the wound closure 10 to a patient), welding, etc.

If the reinforcing layer 26 is located on the same side of the wound closure 10 as the adhesive 14, then the materials used in the reinforcing layer 26 must be compatible with contact against wounded skin in addition to the desired elongation and elasticity characteristics.

5 One advantage of positioning the reinforcing layer 26 on the same side of the wound closure 10 as the adhesive 14 is that the adhesive 14 in the wound bridging portion 22 may be covered by the reinforcing layer 26. Covering the adhesive 14 in that area may prevent the adhesive 14 from adhering to the wound edges and potentially causing problems when the wound closure 10 is removed.

10 Several polymers are known that meet the stated criteria, and polyester terephthalate film, commercially available as Melinex™ S films from DuPont (Wilmington, DE), is presently considered preferred. These films are commercially available in thicknesses of 50 microns (0.002 inch) and 36 microns (0.0014 inch), both of which are considered suitable in connection with the present invention. Thicker films may
15 be more likely felt by the patient when placed against the tender wound edges. It may be preferred that the material of the reinforcing layer 26 have a thickness of 75 microns (0.003 inch) or less, more preferably 60 microns (0.0023 inch) or less, and possibly even more preferably 30 microns (0.0012 inch) or less.

Referring now to Fig. 4, four asymmetric wound closures 10 are used in
20 coordination to hold together the wound edges of a wound (W), illustrated in this case on the arm of a patient. Of particular note is the alternating arrangement of the end portions 20a and 20b, with the long and short end portions 20a and 20b of the asymmetric wound closures 10 being deployed on opposite sides of the wound alternately. The wider pad portions 24a and 24b may increase the holding power of the wound closures 10, but if the
25 wound closures were end-for-end symmetrical, they might interfere with and overlap each other along a straight wound such as the one depicted. In other words, there would be a limit as to how closely they could be placed together, and that limit might preclude their use if the wound needed to be bound more densely. However, the figure illustrates how the unequal lengths of the end portions 20a and 20b allow the wound closures 10 to nest
30 together for an excellent combination of reduced wound occlusion, sufficient points of

binding across the wound per linear wound length, and increased surface area for taking a firm grip on the skin.

Referring now to Figs. 5 and 6, a wound closure 10 as described above is illustrated in use near a human eye to bind a wound (W) on the orbital ridge. The short, but wide shape of end portion 20a of the wound closure 10 (including pad portion 24a) offers advantages in closing wounds close to the delicate eye. As depicted in Fig. 6, the elasticity of the wound closure 10 of the present invention is capable of holding the wound closed even under extreme flexing.

Referring now to Fig. 7, one preferred physical form for delivering the wound closures is illustrated. Four (or some other number the consumer finds convenient) wound closures 10 are provided on a single release liner 16. The release liner 16 is large enough and stiff enough to provide a convenient way to hold the wound closures and allows them to be peeled off individually for application to a wound.

Various elastomeric webs are suitable for use as backings 12 in wound closures 10 of the present invention; for example, thin layers of polyvinyl chloride foams may provide the desired properties. Certain nonwoven elastomeric webs based on melt blown webs of thermoplastic elastomeric small diameter fibers may, however, be preferred due to their exceptional conformability and moisture vapor transmission properties. More particularly, elastomeric thermoplastic materials from which microfiber webs can be prepared include, for example, elastomeric polyurethanes, elastomeric polyesters, elastomeric polyamides and elastomeric A-B-A' block copolymers wherein A and A' are styrenic moieties and B is an elastomeric midblock.

The elastomeric small diameter fibers preferred for use with the present invention preferably have diameters of from about 1 micron to greater than 50 microns, more preferably from about 5 microns to about 30 microns. The elastomeric web thus formed may preferably recover at least 85%, more preferably at least 90%, and most preferably at least 95%, in the machine direction after being stretched 30%. It may also be preferred that the web used for the backings 12 recover at least 80%, more preferably at least 85%, most preferably at least 90%, in the cross direction (i.e., transverse to the machine direction) after being stretched 30% in that direction.

Nonwoven melt blown elastomeric webs can be prepared by a process similar to that taught in Wentz, Van A., "Superfine Thermoplastic Fibers" in Industrial Engineering Chemistry, Vol.48, pages 1342 et seq. (1965), or in Report No. 4364 of the Naval Research Laboratories, published May 25, 1954 entitled "Manufacture of Superfine Organic Fibers" by Wentz, Van A., Boone, C. D. and Fluharty, E.L. (except that a drilled die may preferably be used). The thermoplastic elastomeric materials are extruded through the die into a high velocity stream of heated air which draws out and attenuates the fibers prior to their solidification and collection. The fibers are collected in a random fashion, such as on a perforated screen cylinder, prior to complete fiber solidification so that the fibers are able to bond to one another and form a coherent web which does not require additional binders. The blown fibers can be collected directly on an adhesive film carried on a release liner. Specific physical characteristics of the web are achieved by properly balancing the polymer rheology, the fiber forming and collection phases of the process to achieve desired web properties. More information about elastomeric webs suitable for use with the present invention can be found in co-assigned U.S. Patent 5,230,701 (Meyer et al.). Suitable backings can also be formed from breathable nonwoven tape backings where the nonwoven tape backing includes a fibrous nonwoven web formed in part by multicomponent fibers having an adhesive component region. The multicomponent fibers are distributed throughout the width dimension of the nonwoven tape backing such that adhesive component region is exposed on both outer faces of the nonwoven tape backing. The adhesive component region is preferably a pressure-sensitive adhesive region formed by hot melt coextrusion of the adhesive component and at least one nonadhesive component to form the multicomponent fibers. The nonwoven tape backing is preferably formed simultaneously with the formation of the multicomponent fibers or simultaneously with the collection of the multicomponent fibers into the nonwoven backing. Details about how such materials can be formed and then provided with an adhesive layer may be found in co-assigned U.S. Patent 6,107,219 (Joseph et al.).

The backing 12 is preferably coated with a skin compatible pressure sensitive adhesive layer 14. When multicomponent fiber backings as described above are used for the backing, it may be particularly convenient to prepare a melt blown microfiber pressure sensitive adhesive web and then laminate this web to the backing. The examples entitled

"Adhesive Sample" 1, 2, and 3 in U.S. Patent 6,107,219 (Joseph et al.) disclose materials and methods that may be suitable for use with the present invention.

Other preferred pressure sensitive adhesives which can be used in the adhesive layer of the present invention are the normal adhesives which are applied to the skin such as the acrylate copolymers described in U.S. Patent RE 24,906, particularly a 97:3 weight ratio iso-octyl acrylate:acrylamide copolymer or a 96:4 weight ratio iso-octyl acrylate:acrylamide copolymer. Other medical grade skin adhesives such as copolymers of iso-octyl acrylate and N-vinyl pyrrolidone, or copolymers of iso-octyl acrylate and acrylic acid, can also be used. A layer of about twenty-five grams of skin compatible pressure sensitive adhesive per square meter of integrated backing may be considered suitable.

Liners which are suitable for use in connection with the wound closures of the present invention can be made of kraft papers, polyethylene, polypropylene, polyester or composites of any of these materials. The liners may preferably be coated with release agents such as fluorochemicals or silicones. For example, U.S. Patent 4,472,480 describes low surface energy perfluorochemical liners. Some preferred liners are papers, polyolefin films, or polyester films coated with silicone release materials. One example of a commercially available release liner that may be considered suitable for use with the present invention is a silicone coated release paper available as SC 50 1F M4D from Sopal France, of Dax, France. Also considered suitable is ESP-48 liner, commercially available from DCP-Lohja of Cullman, AL.

Other combinations of adhesives and liners are contemplated for use with embodiments according to the present invention. Those skilled in the art will be familiar with the processes of testing a new adhesive against different liners or a new liner against different adhesives to arrive at the combination of qualities desired in a final product. The considerations pertinent to the selection of a silicone release liner can be found in Chapter 18 of the Handbook of Pressure Sensitive Adhesive Technology, Van Nostrand-Reinhold, 1982, pp. 384-403. U.S. Patent 4,472,480 also describes considerations pertinent to the selection of a perfluoropolyether release liner.

The wound closures according to the present invention may be conveniently made by preparing the backing as a long, indefinite length web which is slit to widths

appropriate to the closure to be made. The adhesive layer may then be applied by any suitable technique, e.g., curtain or knife coating. Where desired, a narrow ribbon of material is laid down onto the adhesive layer to form the reinforcing layer. Typically, a release liner is laminated to this construction, either in a single layer or in an overlapped two-piece arrangement as desired. Wound closures are then die cut from the laminated construction, piercing the release liner if individual closures are desired, or sparing the release liner if an arrangement according to Fig. 7 is desired. Conventional slitting and die cutting techniques will serve in a fashion well known to the artisan.

Examples

The following examples have been selected merely to further illustrate features, advantages, and other details of the invention. It is to be expressly understood, however, that while the examples serve this purpose, the particular materials and components used, as well as other conditions and details, are not to be construed in a manner that would unduly limit the scope of this invention.

Example 1

A backing of blown microfiber web including 3-layer fibers containing 80% polyurethane and 20% "KRATON" PSA/polyethylene blend was laminated to blown microfiber polyacrylate PSA web using the materials and methods described Example 3 of U.S. Patent 6,107,219 (Joseph et al.). A 12.5 mm (0.5 inch) wide strip of Melinex™ S polyester terephthalate film, 36 microns (0.00142 inch) thick (available from DuPont, Wilmington, DE) was laminated to the polyacrylate PSA web.

A wound closure having an overall length of 57.2 mm (2.25 inch) was die cut from the adhesive composite web thus formed. The wound closure was shaped generally as depicted in the figures, except that the opposing end portions of the wound closure were of equal lengths as measured from the wound bridging portion. The main width of the wound closure was 8 mm, expanding at the ends into pad portions of generally circular shape having a diameter of 12.5 mm (0.5 inch). A neck portion was present within the area containing the polyester film, narrowing to 4 mm wide at its narrowest point.

Example 2

The wound closure according to Example 1 was tested for elongation, adhesion, and recovery after stretch. The wound closure was adhered to a very stretchable and recoverable test substrate which was stretched to force the wound closure to elongate by 30%. Film to be used as the test substrate was made according to the first two paragraphs of Example 1 of U.S. Patent 5,531,855 (Heinecke et al.).

A strip of the test substrate material was attached to two handles so as to leave an unstretched 70 mm span of test substrate between the handles. The wound closure was adhered to the test substrate using its own adhesive layer to the plain side of the test substrate with the long axis of the wound closure aligned with the direction of pull between the handles.

Over the course of approximately two seconds, the handles were pulled sufficiently to force the wound closure to extend to 74.4 mm (30% elongation) in length. A measurement of the elongation of the wound bridging portion was taken, then the force on the handles was gently removed and more measurements taken.

During the time the wound closure was stretched to 30% elongation, the wound bridging portion elongated from 12.5 mm to 13.25 mm, or 6%. After stretching, the wound closure recovered to a length of 58.5 mm (92.4% recovery), and the wound bridging portion recovered to a length of 12.5 mm (essentially 100% recovery).

Various modifications and alterations of the present invention will be apparent to those skilled in the art without departing from the scope of this invention, and it should be understood that this invention is not limited to the illustrative embodiments set forth herein.

What is claimed is:

1. A wound closure for closing a wound in skin, the wound closure comprising:
an adhesive for adhering the wound closure to skin;
5 opposing elastomeric end portions; and
a wound bridging portion between the end portions;
wherein the wound closure recovers at least 85% after being stretched 30%, and
wherein the wound bridging portion stretches less than the end portions when subjected to
the same force, whereby the wound bridging portion tends to maintain the wound closed
10 against forces generated by stretching of skin.
2. A wound closure according to claim 1 or 2, wherein the wound bridging portion
stretches 8% or less when the wound closure stretches 30%.
- 15 3. A wound closure according to claim 1, wherein the wound bridging portion recovers
100% after the wound closure recovers at least 85% after stretching 30%.
4. A wound closure according to claim 1, wherein the wound closure recovers at least
95% after being stretched 30%, and wherein the wound bridging portion stretches 5% or
20 less when the wound closure stretches 30%.
5. A wound closure according to any of claims 1-4, wherein the wound bridging portion
stretches 1% or less when the wound closure stretches 30%.
- 25 6. A wound closure according to any of claims 1-5, wherein the wound closure has a
length and width, the wound bridging portion comprising a neck having a width less than
the width of the end portions.
7. A wound closure according to any of claims 1-6, wherein the end portions have
30 unequal lengths as measured from the wound bridging portion to the ends of the wound
closure.

8. A wound closure according to any of claims 1-7, wherein the adhesive comprises a pressure sensitive adhesive layer, and further wherein any of the pressure sensitive adhesive in the wound bridging portion is covered.

5

9. A wound closure according to any of claims 1-8, wherein the wound bridging portion comprises an elastomeric backing and a reinforcing layer attached to the backing.

10

10. The wound closure according to claim 9, wherein the adhesive comprises a pressure sensitive adhesive layer on the end portions for adhering the wound closure to skin, and further wherein the reinforcing layer covers the pressure sensitive adhesive in the wound bridging portion.

15

11. The wound closure according to any of claims 9 or 10, wherein the reinforcing layer comprises a polymeric film.

12. A method of tending a wound, comprising:

20

providing a wound closure having a short side and a long side, the wound closure comprising:

an adhesive for adhering the wound closure to skin;

two opposing end portions located at opposing ends along a length of the wound closure; and

25

a wound bridging portion separating the opposing end portions, the wound bridging portion having a width less than a width of the end portions;

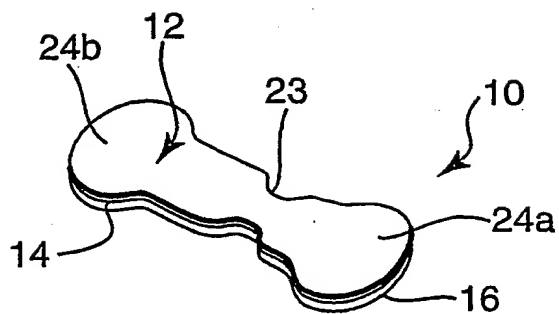
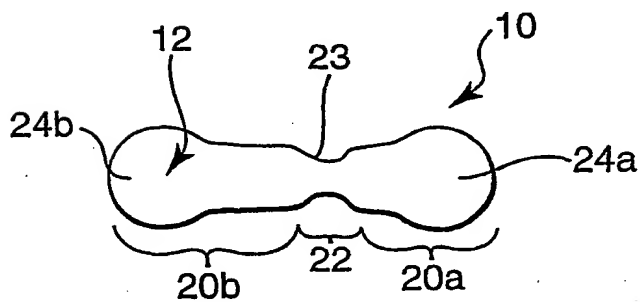
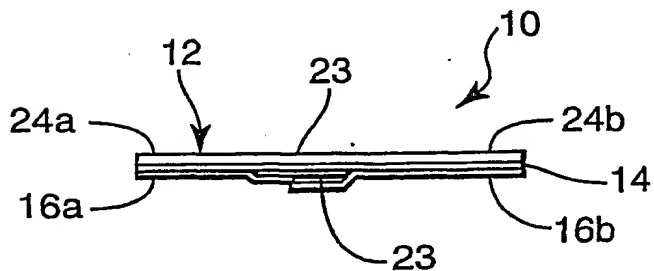
wherein the opposing end portions comprise unequal lengths as measured from the wound bridging portion to the ends of the wound closure, with the shorter end portion comprising the short side of the wound

30

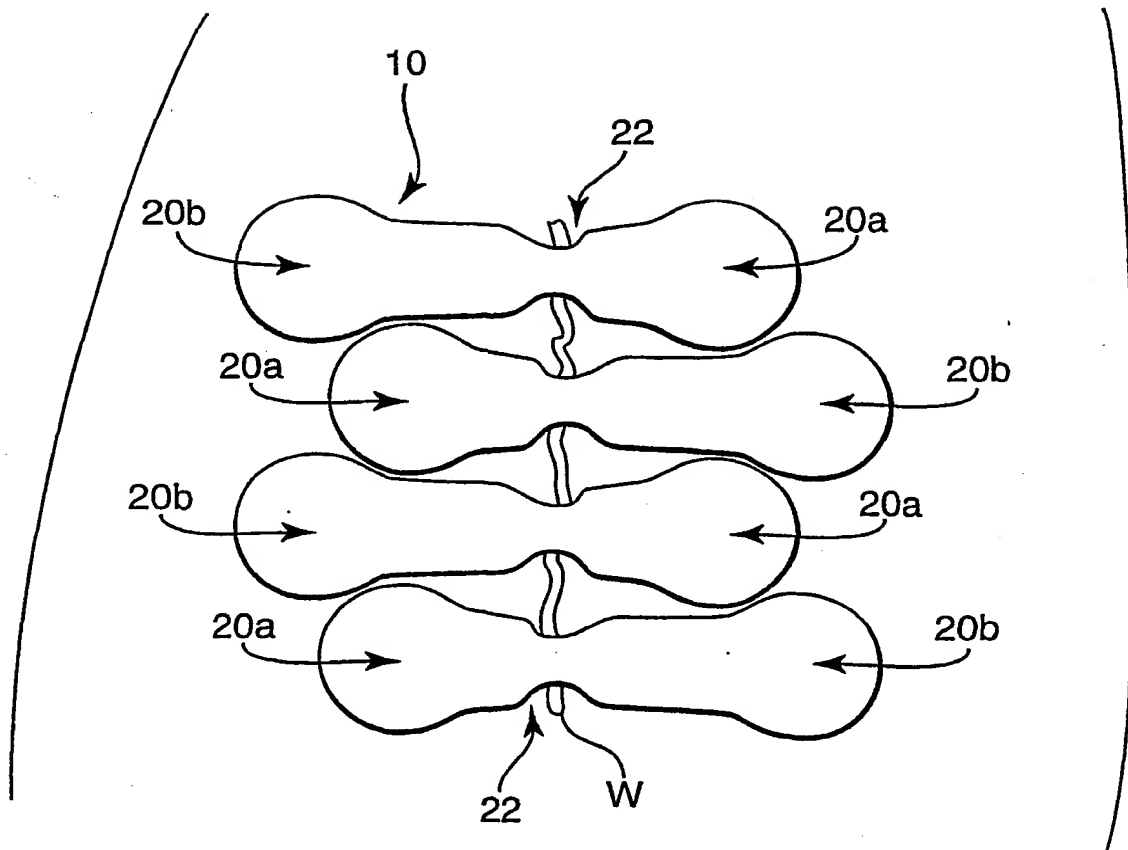
closure and the longer end portion comprising the long side of the wound closure; and

adhering the wound closure to a patient such that the wound bridging portion spans a wound.

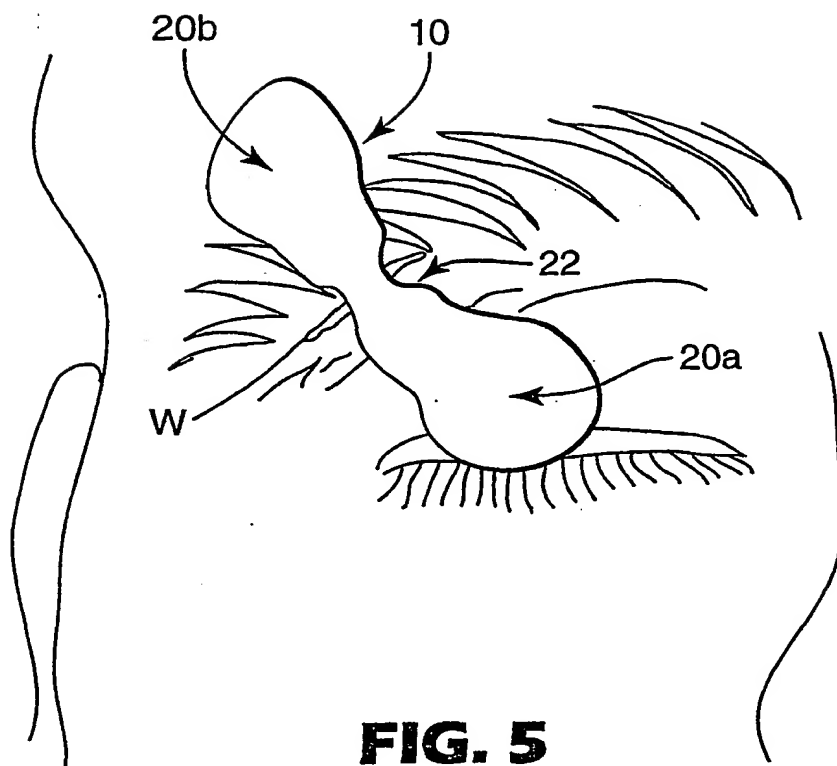
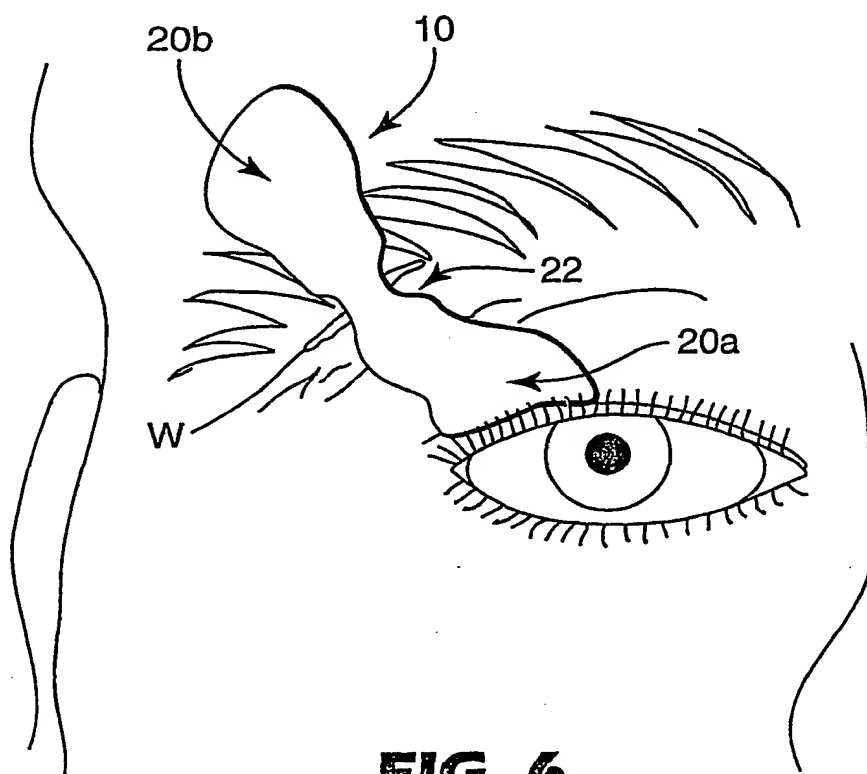
1/4

**FIG. 1****FIG. 2****FIG. 3**

2/4

**FIG. 4**

3/4

**FIG. 5****FIG. 6**

4/4

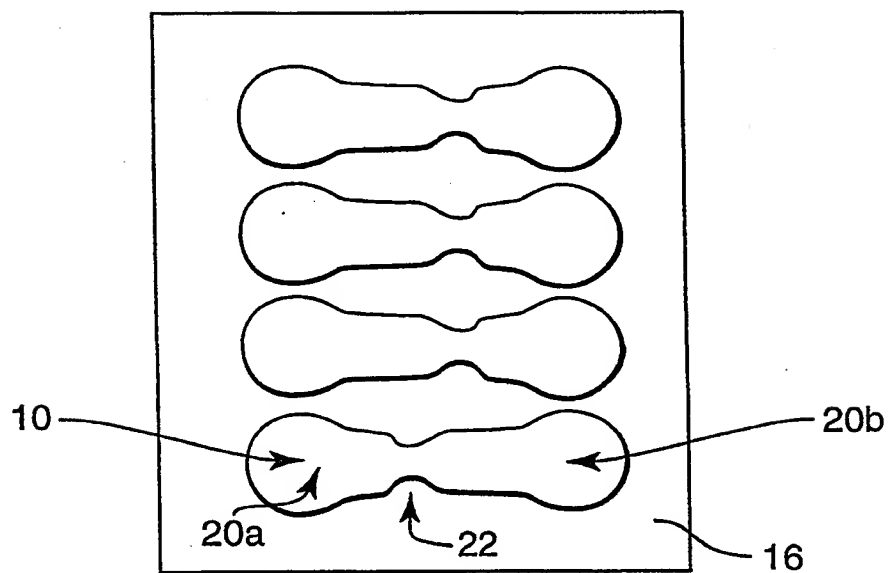


FIG. 7

INTERNATIONAL SEARCH REPORT

Application No

PCT/US 01/06333

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F13/02 A61F13/12 A61B17/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 995 114 A (PRICE JR JAMES A) 26 February 1991 (1991-02-26) claims; figures	1
Y	US 4 605 005 A (SHEEHAN JOSEPH C M) 12 August 1986 (1986-08-12) claims; figures	1-6,9
Y	WO 93 17633 A (PODELL DAVID L JR ;PODELL HOWARD I (US); GOLDSTEIN ALBERT (US)) 16 September 1993 (1993-09-16) page 9, line 22 -page 10, line 1; claims 1-5	1-6,9
A	page 11, line 24 - line 31; figure 4	7
A	WO 92 10983 A (GARDNER ARTHUR MICHAEL NEWSAM) 9 July 1992 (1992-07-09) abstract; figures	1-5
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 August 2001

Date of mailing of the international search report

01.10.2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mirza, A

INTERNATIONAL SEARCH REPORT

In Application No
PCT/US 01/06333

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 538 500 A (PETERSON DONALD A) 23 July 1996 (1996-07-23) column 4, line 32 - line 35; claims 1-3 ---	1-5
A	GB 831 401 A (BENJAMIN B BLACKFORD) 30 March 1960 (1960-03-30) claims; figures ---	1,6
A	US 4 302 500 A (FLORA RICHARD D) 24 November 1981 (1981-11-24) claims; figures ---	1
A	US 3 665 918 A (LINDQUIST JULIUS A ET AL) 30 May 1972 (1972-05-30) abstract; figures ---	1
A	EP 0 676 183 A (JOHNSON & JOHNSON CONSUMER) 11 October 1995 (1995-10-11) claims; figures -----	1

INTERNATIONAL SEARCH REPORT

ational application No.
PCT/US 01/06333

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 10
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Int Application No

PCT/US 01/06333

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4995114 A	26-02-1991	NONE	
US 4605005 A	12-08-1986	AT 26207 T AU 559006 B AU 1315383 A CA 1196831 A DE 3370583 D DK 151383 A EP 0092334 A JP 59000048 A US 4526173 A US 4702251 A ZA 8302386 A	15-04-1987 19-02-1987 20-10-1983 19-11-1985 07-05-1987 13-10-1983 26-10-1983 05-01-1984 02-07-1985 27-10-1987 27-06-1984
WO 9317633 A	16-09-1993	US 5419913 A AU 668146 B AU 3790893 A CA 2117638 A DE 69326607 D DE 69326607 T EP 0630216 A JP 8502664 T RU 2128481 C US 5620702 A	30-05-1995 26-04-1996 05-10-1993 16-09-1993 04-11-1999 31-05-2000 28-12-1994 26-03-1996 10-04-1999 15-04-1997
WO 9210983 A	09-07-1992	AT 190215 T DE 69132035 D DE 69132035 T EP 0608223 A GB 2267441 A,B JP 6503739 T	15-03-2000 13-04-2000 26-10-2000 03-08-1994 08-12-1993 28-04-1994
US 5538500 A	23-07-1996	NONE	
GB 831401 A	30-03-1960	NONE	
US 4302500 A	24-11-1981	AU 535275 B AU 6603981 A CA 1158942 A JP 56112255 A	08-03-1984 16-07-1981 20-12-1983 04-09-1981
US 3665918 A	30-05-1972	CA 943733 A CH 562616 A DE 2100853 A DK 132520 B ES 194330 Y FR 2076050 A GB 1285531 A JP 55029118 B NL 7100397 A SE 364638 B ZA 7100180 A	19-03-1974 13-06-1975 29-07-1971 22-12-1975 16-03-1975 15-10-1971 16-08-1972 01-08-1980 14-07-1971 04-03-1974 30-08-1972
EP 0676183 A	11-10-1995	AT 194481 T AU 1632795 A AU 2366399 A BR 9501513 A CA 2146615 A	15-07-2000 19-10-1995 22-07-1999 07-11-1995 09-10-1995

INTERNATIONAL SEARCH REPORT

Int

Application No

PCT/US 01/06333

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0676183 A		CN 1116516 A	14-02-1996
		DE 69517845 D	17-08-2000
		DE 69517845 T	07-12-2000
		JP 8038543 A	13-02-1996
		BR 9501530 A	14-11-1995
		CA 2146616 A	12-10-1995
		CN 1116517 A	14-02-1996
		JP 8038544 A	13-02-1996

THIS PAGE BLANK (USPTO)

THIS PAGE